





INSTALLATION INSTRUCTIONS

#333 Flip-Up License Plate Holder for Standard Hawse Fairleads(10" C/C)
Please read and fill out the enclosed warranty registration card to activate your warranty.

Parts Checklist

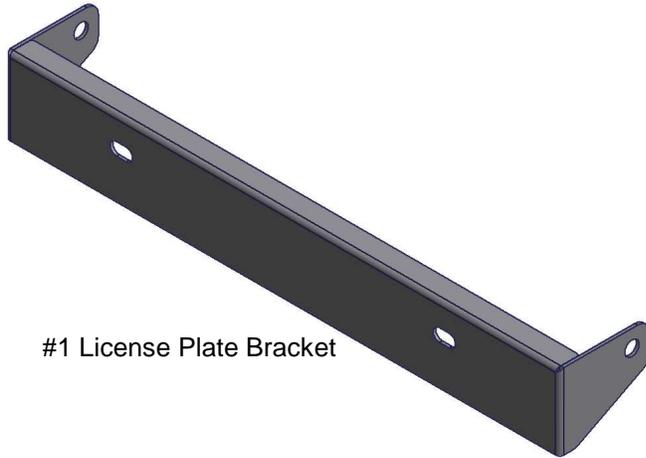

#1 License Plate Bracket

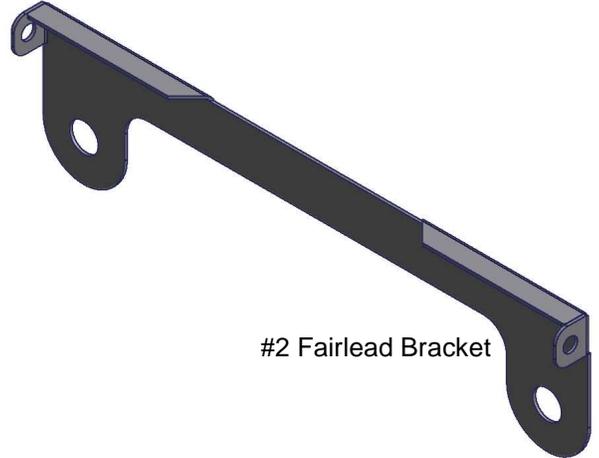

#2 Fairlead Bracket

#333 Shipping Package



#3.1 (4) 1/4"x3/4"L
Screws



#3.2 (4) 1/4" Steel
Washers



#3.3 (4) 1/4"
Nylock Nuts



#3.4 (2) 1/4" Nylon
Washers

Tools required

- #2 Phillips Screwdriver
- 7/16" wrench

ATTENTION:

- ***THIS FLIP-UP LICENSE PLATE HOLDER WAS DESIGNED TO WORK WITH STANDARD HAWSE FAIRLEADS WITH 10" CENTER TO CENTER MOUNTING HOLES.***

Mounting Directions

1. Assemble the #333 Flip-Up License Plate Holder, as shown in Figure 1 (Reverse Side). The #1 License Plate Bracket fits over the #2 Fairlead Bracket. Slip the #3.4 Nylon Washers between the #1 and #2 Brackets during assembly.
2. Tighten the screws so that the desired friction between the #1 and #2 Brackets is achieved. Further adjustment may be made after final assembly, if necessary.
3. Using appropriate tools loosen the mounting bolts of the hawse fairlead.
4. Remove one of the mounting bolts and install the #333 Flip-Up License Plate Holder behind the fairlead, so that it pivots on the mounting bolt.
5. Remove the second mounting bolt and rotate the Holder into its final position.
6. Adjust the Holder/fairlead as necessary to ensure that they are level with the vehicle bumper/winch mount, and tighten the mounting bolts to maintain the Holder/fairlead in place.
7. Install your license plate onto the #333 Flip-Up License Plate Holder and fasten with the supplied #3.1 screws, #3.2 washers, and #3.3 nuts. (See Figure 2, on Reverse Side)

