

TRUXXX

LIFT AND LEVEL KITS

SAFETY WARNING!

Always use the correct tools, and wear safety goggles. We **STRONGLY** recommend installation by a licensed mechanic on a properly secured locking lift.

Truxxx Manufacturing LLC
810 E 19th Street, Tucson AZ 85719

 **Toll free: 888-660-5892**
 **email: info@truxxx.com**

TIRE FITMENT ADVICE

The best way to ensure proper tire fitment is to install the kit before purchasing your wheels and tires. Always test fit tires and wheels before purchasing.

VEHICLE RIDE WARNING!

Trucks with lift or level kits installed have a higher center of gravity. Aggressive and sudden direction changes may cause a tip over.

604045 Lift and Level Kit
Dodge Ram 1500 4WD

This kit contains:

2- spring preload spacers

2- upper strut spacers

Instructions

Warranty Card

Stickers



Installation Tips

Always use caution handling ABS or wheel sensor wiring. Avoid tension of any kind on wiring harness as this may cause damage or failure.

1. Trucks are often not level side to side from the factory. Please measure before installation.
2. Re-torque all hardware to manufactures specifications
3. When aligning, to get the best tire wear use our supplied specifications. OEM specifications are for trucks with stock wheels and tires. Larger tires will wear differently.
4. All instructions are written with vehicle on a 2-post lift with tires removed.

Step 1

Loosen and remove the upper ball joint nut, tie rod nut, and Sway bar nut.

A hammer may be needed to break the ball joint and tie rod free.

Special Note:

On 4X4 models you must remove the drive axle nut. **Failure to follow this step will make removal of the strut difficult.**

Step 2

Remove the strut from the vehicle and **mark the strut for proper re-assembly**. Using a spring compressor tool, disassemble the strut and install the TRUXXX part.

*Refer to Figure A for proper placement.

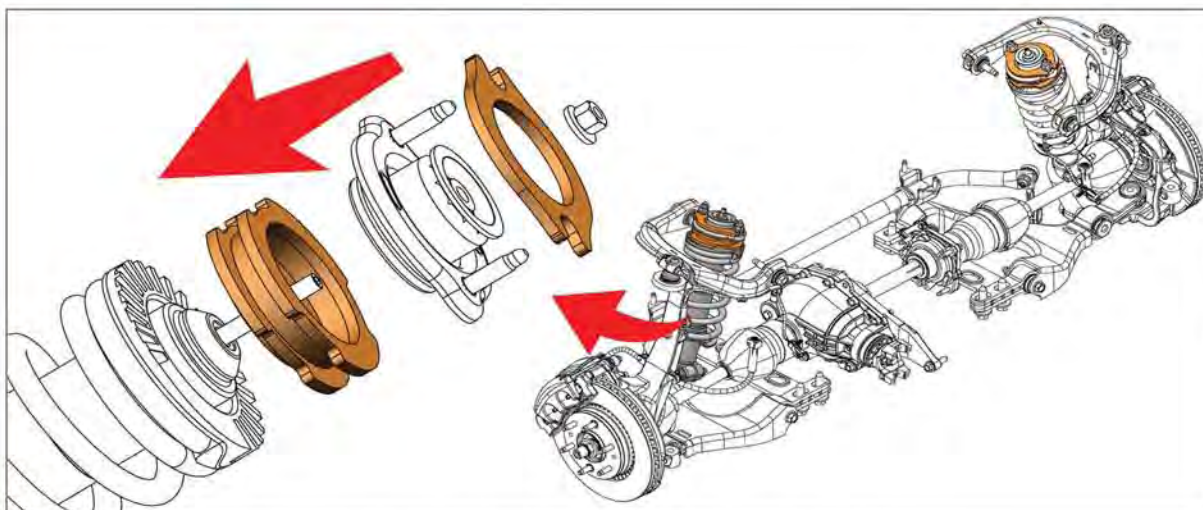


Figure A

Illustration is for reference only. Part dimensions will vary from kit to kit.

Instructions continued on back.



SAFETY WARNING!
Always use the correct tools, and wear safety goggles. We **STRONGLY** recommend installation by a licensed mechanic on a properly secured locking lift.

Truxxx Manufacturing LLC
810 E 19th Street, Tucson AZ 85719

 **Toll free: 888-660-5892**
 **email: info@truxxx.com**

TIRE FITMENT ADVICE

The best way to ensure proper tire fitment is to install the kit before purchasing your wheels and tires. Always test fit tires and wheels before purchasing.

VEHICLE RIDE WARNING!

Trucks with lift or level kits installed have a higher center of gravity. Aggressive and sudden direction changes may cause a tip over.

604045 Dodge Ram 4x4 TRUXXX Installation Instructions (cont.)

Step 3

Reinstall the strut assembly in it's stock location. Then reinstall the upper ball joint nut followed by the tie rod nut and sway bar nut.

*It may be necessary to use a pry bar to aid in the re-installation of the strut assembly, and a pit jack to raise the lower control arm to get the Upper ball joint nut installed.

Verify that all hardware has been tightened to the proper torque specs and re-install wheel.

Step 4

Repeat steps 1 through 3 on the opposite side of the vehicle. Follow each step closely making sure to double check all hardware for correct torque.

Step 5

Wheel alignment specifications

Alignment notes:

We recommend that a technician with experience doing alignments on lifted trucks perform the alignment. Large tires wear differently than OEM sized tires. Always do an alignment after changing tires on a vehicle.

	Left	Right
Caster (degrees)	3.5	4
Camber (degrees)	0	-1/4
Toe	1/16 inch toe in	
Special Tools	none	

WARNING! This TRUXXX leveling kit is designed and engineered to level out a stock vehicle with no prior modifications. The use of this kit along with items such as a rear add a leaf, airbags, suspension lifts, body lifts or any other type of lifting accessory, **shall be done at the vehicle owners risk.**